



INNO-FIT™ SRK

Semirigid Kynar™ Tubing UL REC. 600V, 150°C (VW-1)

Description

The Innovative Power Products INNO-FIT™ type SRK tubing is a semirigid, thin wall, highly flame-retarded, heatshrinkable Kynar™ tubing recognized by Underwriters Laboratories (UL) Subject 224 as a VW-1 rated material. It has excellent cut-through and solvent resistance properties. The shrink temperature is 175°C with an indefinite stoaage life. This tubing is ideal for strain relieving or protecting components in high temperature environments. It is an excellent tubing where maximum abrasion or cut-through resistance or solvent resistance is desired.

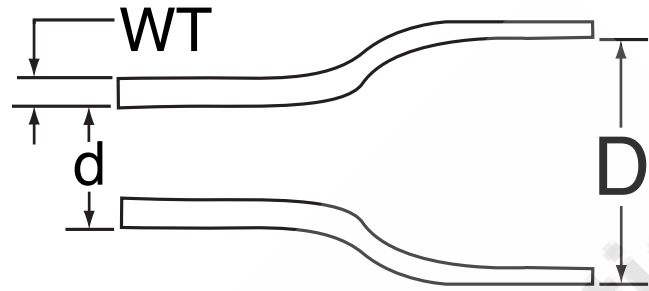


Illustration is not to scale

Related Product Information

INNO-FIT™ TYPE SRK: Price List PL-220

- Flame Retarded UL-244 (VW-1)
- Available in Clear Only
- Cut Through and Abrasion Proof
- Excellent Solvent Resistance
- Lightweight and Thin Walled
- Indefinite Shelf Life
- 175°C Shrink Temperature
- -55°C to +175°C Operating Range
- UL Recognized 600 Volt, 150°C

Selection and Ordering Information

Find the diameter required for the application. Always select the largest tubing size that will shrink down on the smallest diameter.

Example: for a box of clear tubing to insulate a bundle of wires with a combined outside diameter of 0.65 inches, the tubing selection will be: Tubing Type Size* Packaging [box(-B)] – INNO-FIT SRK- 1-B

Wire Range	Tubing Size	Inside Diameter		Wall Thickness Post Recovery WT	Standard Box 4 foot lengths	Standard Spool Length
		As Supplied (D)	After Recovery (d)			
None	3/64	.046 (1.2mm)	.023 (0.6mm)	.010 (0.25mm)	250 pcs.	Not Available
None	1/16	.063 (1.6mm)	.031 (0.8mm)	.010 (0.25mm)	250 pcs.	Not Available
22-20	3/32	.093 (2.4mm)	.046 (1.2mm)	.010 (0.25mm)	250 pcs.	Not Available
18-16	1/8	.125 (3.2mm)	.062 (1.6mm)	.010 (0.25mm)	250 pcs.	Not Available
14-10	3/16	.187 (4.8mm)	.093 (2.4mm)	.010 (0.25mm)	50 pcs.	Not Available
10-8	1/4	.250 (6.4mm)	.125 (3.2mm)	.012 (0.30mm)	50 pcs.	Not Available
6-4	3/8	.375 (9.5mm)	.187 (4.8mm)	.012 (0.30mm)	50 pcs.	Not Available
3-1	1/2	.500 (12.7mm)	.250 (6.4mm)	.012 (0.30mm)	25 pcs.	Not Available
1-3/0	3/4	.750 (19.1mm)	.375 (9.5mm)	.017 (0.43mm)	25 pcs.	Not Available
4/0-750	1	1.00 (25.4mm)	.500 (12.7mm)	.019 (0.48mm)	15 pcs.	Not Available
1000-1250	1-1/2	1.50 (38.1mm)	.750 (19.1mm)	.020 (0.51mm)	15 pcs.	Not Available
1500-2500	2	2.00 (50.8mm)	1.00 (25.4mm)	.020 (0.51mm)	15 pcs.	Not Available